




THIS CONFIGURATION ENABLES THE COUPLING TO EXCAVATORS MAKING IT SUITABLE FOR THE HANDLING OF LOADS IN HARD-TO-REACH AREAS.

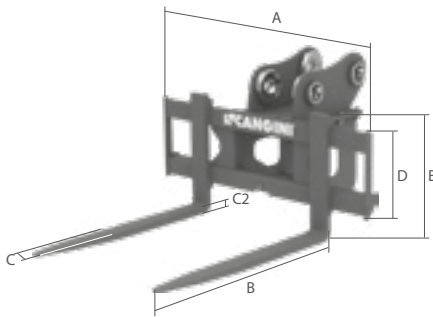

MOD.		FK10 S		FK10		FK18 S	
A	MM (IN)	1150	(45)	1150	(45)	1150	(45)
B	MM (IN)	1000	(39)	1200	(47)	1200	(47)
C	MM (IN)	80	(3,1)	80	(3,1)	100	(3,9)
C2	MM (IN)	30	(1,2)	30	(1,2)	35	(1,4)
D	MM (IN)	406	(16)	406	(16)	406	(16)
E	MM (IN)	620	(24)	620	(24)	620	(24)
	KG (LB)	170	(375)	182	(401)	210	(463)
	KG (LB)	1000	(2205)	1000	(2205)	1800	(3968)