





APPLIED TO THE ARM OF THE EXCAVATOR, THE GRT CANGINI EXCAVATOR THUMB FACILITATES THE GRIP OF THE ROCKY MATERIAL, TRUNKS AND MUCH MORE LIKE A GRAPPLE. ONCE IT HAS BEEN FOLDED, IT ALLOWS THE NORMAL ACTIVITY OF THE BUCKET SIMPLIFYING THE OPERATOR IN HIS JOB.

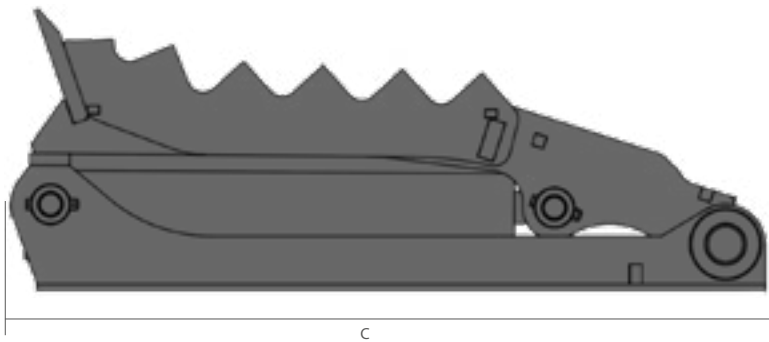

		TONS (LB)	1,8 - 2,5 (3968,32-5511,56)	2,5 - 4,0 (5511,56-8818,49)	4,0 - 7,5 (8818,49 16534,7)	7,5 - 10,0 (16534,7-22046,2)	10,0 - 14,0 (22046,2-30864,7)	14,0 - 18,0 (30864,7-39683,2)
		MOD.	GRT 20	GRT 25	GRT 30	GRT 40	GRT 45	GRT 50
	A	MM (IN)	200 (7,8)	250 (9,8)	300 (11,8)	400 (15,7)	450 (7,87)	500 (17,7)
	B	MM (IN)	245 (9,6)	245 (9,6)	355 (13,9)	355 (13,9)	485 (19,0)	485 (19,0)
	C	MM (IN)	583 (22,9)	583 (22,9)	915 (36,0)	915 (36,0)	1620 (63,7)	1620 (63,7)
		KG (LB)	25 (55)	30 (66)	95 (209,4)	135 (297,6)	355 (782,6)	374 (824,5)
	MAX	BAR (PSI)	200 (2900,7)	200 (2900,7)	250 (3625,9)	250 (3625,9)	300 (4351,1)	300 (4351,1)

