




WG-SP WOOD GRABS WG
FOR EXCAVATOR



ROTATION OF 360°, THIS FUNCTION IS LINKED TO THE CHOICE OF THE HYDRAULIC ENGINE - ASSISTS THE OPERATOR IN THE LOGS' GRIP PHASE, SPEEDING UP THIS OPERATION AND MAKING HIS WORK EFFECTIVE. PARTS SUBJECT TO WEAR ARE MADE OF DOMEX 700. IT'S PARTICULARLY SUITED FOR THE HANDLING OF CUT WOOD AND PRUNINGS. IT'S STANDARD EQUIPPED WITH A BLOCK VALVE ON THE CLAMP-CLOSING CYLINDER.

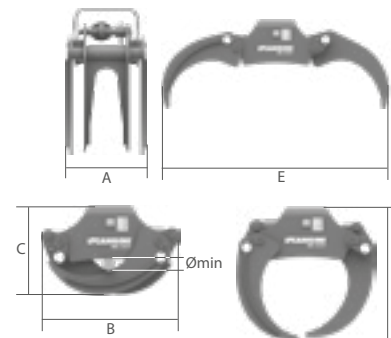

	TONS (LB)	1,2 - 1,8 (2646-3968)	1,8 - 3,5 (3968-7716)	3,5 - 4,0 (7716-8818)	4,0 - 5,0 (8818-11023)	5,0 - 7,0 (11023-15432)	7,0 - 8,0 (15432-17637)	8,0 - 10,0 (17637-22046)	10,0 - 12,0 (22046-26455)	12,0 - 16,0 (26455-35274)
MOD.		WG 1100SP	WG 1100SP	WG 1300SP	WG 1300SP	WG 1500SP	WG 1650SP	WG 1800SP	WG 1800SP	WG 2000SP
A	MM (IN)	425 (16,7)	425 (16,7)	450 (18)	450 (18)	530 (21)	530 (21)	640 (25)	640 (25)	640 (25)
B	MM (IN)	610 (24)	610 (24)	735 (29)	735 (29)	815 (32)	1030 (41)	1180 (46)	1180 (46)	1225 (48)
C	MM (IN)	440 (17)	440 (17)	495 (19)	495 (19)	580 (23)	590 (23)	680 (27)	680 (27)	730 (29)
D	MM (IN)	685 (27)	685 (27)	770 (30)	770 (30)	830 (33)	980 (38)	985 (39)	985 (39)	1060 (42)
E	MM (IN)	1210 (48)	1210 (48)	1430 (56)	1430 (56)	1650 (65)	1650 (65)	1845 (73)	1845 (73)	2020 (80)
W/O COUPLER	KG (LB)	100 (221)	100 (221)	140 (309)	140 (309)	225 (496)	300 (661)	440 (970)	440 (970)	495 (1091)
MIN.	MM (IN)	80 (3,1)	80 (3,1)	75 (3)	75 (3)	95 (3,7)	100 (3,9)	120 (4,7)	120 (4,7)	150 (5,9)
MAX.	L/MIN (GALL/MIN)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)	50 (13)
MAX.	KG (LB)	1900 (4189)	1900 (4189)	2100 (4630)	2100 (4630)	3100 (6834)	4000 (13228)	6000 (13228)	6000 (13228)	6000 (13228)
MAX.	BAR (PSI)	200 (2901)	200 (2901)	200 (2901)	200 (2901)	200 (2901)	230 (3336)	250 (3626)	250 (3626)	250 (3626)



OPTIONAL

1 DOUBLE PIN HITCH (A) OR ADAPTER (B)

2 SINGLE PIN HITCH

3 TWO PIPE KIT

IT ENABLES THEIR ROTATION AND THE JAWS' OPENING AND CLOSING FUNCTIONS EVEN ON MACHINES EQUIPPED WITH A SINGLE HYDRAULIC DOUBLE-EFFECT LINE. CONTROL KIT WITH MAGNETS TO EASILY PUT IT INSIDE THE CAB.

4 BASIC ROTOR

SHAFT ROTOR TO DRIVE THE GRABS.

5 FLANGED ROTOR

FLANGED ROTOR IDEAL FOR HEAVY DUTY JOBS.